

CT 1210


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- AGM technology: sealed, maintenance-free, no distillate top-up required
- Calcium-doped lead plates ensure high power density
- Low internal resistance, high discharge characteristics
- High starting power
- Increased vibration resistance, shockproof and frost-resistant housing
- Long service life

Battery design

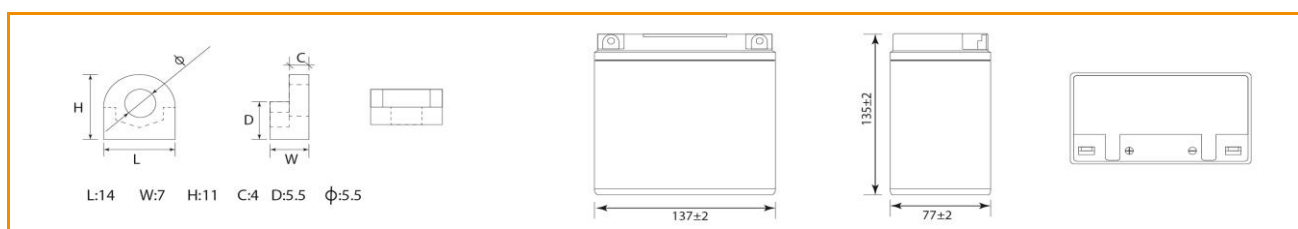

Specifications

Voltage..... 12 V

Capacity			
10 hour discharge	1 A	10,5 B	10 A ₄
27 minute discharge	10 A	9,6 B	4,5 A ₄
7 minute discharge	30 A	9,6 B	3,5 A ₄

Charging current..... 0,9 A

Battery local action.....2% per month

Cycles (25°C)

100% discharge.....	200
80% discharge.....	225
50% discharge.....	500

	JISD (-10°C)	Manufacturer standard (-18°C)
Discharge current	85 A	100 A
Voltage (5 s)	9,3 V	-
EOD voltage	6 V	7,2 V
Discharge time	1min 30 sec	≥ 30 sec


Dimensions (± 2 mm)

Length, mm..... 137

Width, mm..... 77

Height, mm..... 135

Weight with acid, kg.....2.79

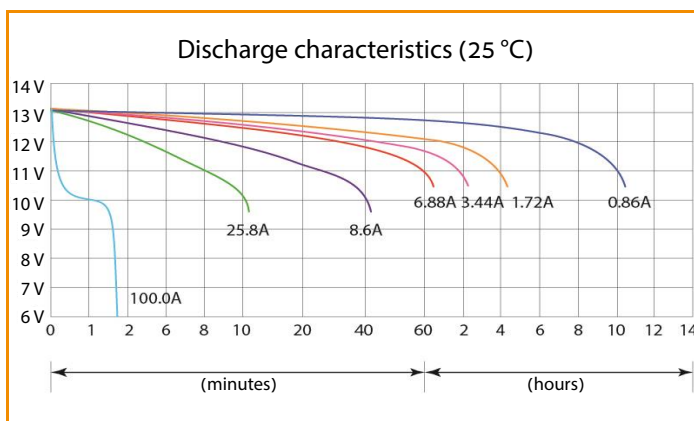

ASTERION CT starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

Commonly used dimensions of ASTERION CT starter batteries are suitable for all well-known motor brands.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.